

REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE

STEZALJKE ZA USPONSKE VODOVE TIP C



SI026060



SI026070

SCHRACK-INFO

- tip C, VBG4: zaštita od dodira prema DIN VDE 0603-2/03.98
- nazivni napon AC 690 V
- ožičenje 4 x 25 mm², prema DIN VDE 0603-2/03.98
- 3-, 4- i 5-polne izvedbe
- uskočno pričvršćivanje za horizontalnu i vertikalnu montažu

OPIS	ŠxVxD (mm)	PAK	TIP	MASA (kg)	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
25 mm²								
3-pol., s po 4 priključka								
25mm ²	60,6x38,3x42,6	30	02603	0,196	9004840157628			SI026030
4-pol., s po 4 priključka								
25 mm ²	80,2x38,3x42,6	30	02604	0,271	4021267026042			SI026040
5-pol., s po 4 priključka								
25 mm ²	99,8x38,3x42,6	20	02605	0,340	4021267026059			SI026050
4-pol., s po 4 priključka								
25 mm ² , 4-pol. plavi	80,2x38,3x42,6	30	02606	0,267	4021267026066			SI026060
5-pol., s po 4 priključka								
25 mm ² , 4-pol. plavi,								
5-pol. žuto/zeleni	99,8x38,3x42,6	20	02607	0,337	4021267026073			SI026070
4-pol., s 3x4 priključka								
25 mm ² i 1x8 priključaka								
25 mm ² , 4-pol. plavi	99,8x38,3x42,6	20	02615	0,340	9004840197365			SI026150

300




NAVIGATOR ZNA NAJKRAĆI PUT!

SCHRACK TECHNIK INTERNET TRGOVINA NA
WWW.SCHRACK.HR

- Lakše do informacija o proizvodima
- Kupovina 24/7
- Brzo do kontakt podatka Vašeg Schrack zastupnika

REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE

STEZALJKE ZA USPONSKE VODOVE TIP A




SI022350/SI022250/SI022350/SI022260

SCHRACK-INFO

- tip A, otvorena stezna mjesta - pokrovnim profilima mogu se zaštititi od dodira (samo za izvedbe 25 mm² i 35 mm²)
- uskočno pričvršćivanje za horizontalnu i vertikalnu montažu (ako nije navedeno drugačije)
- prema VDE 0606 (do 70 mm²), nazivni napon AC 500 V
- 25 mm² - ulaz 2x25 mm²: vijak M6, Md 3 Nm, izlaz 16 mm² obostrano: vijak M5, 3 Nm
- 35 mm² - ulaz 2x35 mm²: vijak M8, Md 4 Nm, izlaz 25 mm² ili 35 mm²: vijak M6, 3 Nm
- 70 mm² - ulaz 2x70 mm²: vijak M8, Md 12 Nm, izlaz 50 mm² ili 35 mm²: vijak M8, 4 Nm
- 150 mm² - ulaz 2x150 mm²: vijak M12, Md 20 Nm, izlaz 50 mm²: vijak M8, 4 Nm

OPIS	ŠxVxD (mm)	PAK	TIP	MASA (kg)	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
25 mm²								
1-pol., 1 pol sa 12 odvoda, 16 mm ²	126x56x38	1	02201	0,442	9004840147186			SI022010
1-pol., 1 pol sa 2 odvoda, 16 mm ²	32,5x43,5x40	1	02225	0,066	4021267022259			SI022250
1-pol., 1 pol sa 6 odvoda, 16 mm ²	62x43,5x40	1	02227	0,117	4021267022273			SI022270
2-pol., 2 pola s po 4 odvoda, 16 mm ²	62x43,5x40	1	02230	0,185	4021267022303			SI022300
4-pol., 3 pola s po 2 odvoda, 16 mm ² mm2 + 1 pol sa 6 odvoda, 16 mm ²	150,5x43,5x40	1	02234	0,303	9004840157444			SI022340
4-pol., 3 pola s po 4 odvoda, 16 mm ² + 1 pol sa 6 odvoda, 16 mm ²	150,5x43,5x40	1	02235	0,370	4021267022358			SI022350
4-pol., 3 pola s po 4 odvoda, 16 mm ² + 1 pol sa 12 odvoda, 16 mm ²	150,5x43,5x40	1	02237	0,437	4021267022372			SI022370
4-pol., 4 pola s po 2 odvoda, 16 mm ²	121x43,5x40	1	02231	0,258	9004840157437			SI022310
5-pol., 5 polova s po 2 odvoda, 16 mm ²	150,5x43,5x40	1	02238	0,311	4021267022389			SI022380

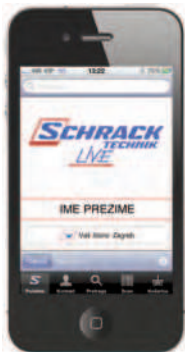























NAVIGATOR ZNA NAJKRAĆI PUT! SA SCHRACK TECHNIK LIVE-PHONE APLIKACIJOM

- Tehnički podaci uvijek na raspolaganju
- Informacije o raspoloživosti i cijenama artikla
- Kupovina i narudžba artikala na dlanu

REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE

STEZALJKE ZA USPONSKE VODOVE TIP A - NASTAVAK

OPIS	ŠxVxD (mm)	PAK	TIP	MASA (kg)	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
35 mm²								
1-pol., 2 pola s po 1 odvodom, 35 mm ²	62x40x50	1	02228	0,098	4021267022280			SI022280
1-pol., 1 pol sa 2 odvoda, 25 mm ²	40x44x44	1	02242	0,098	4021267022426			SI022420
1-pol., 1 pol sa 2 odvoda, 35 mm ²	40x44x44	1	02521	0,095	4021267025212			SI025210
1-pol., 1 pol sa 4 odvoda, 35 mm ²	33x40x50	1	02226	0,129	4021267022266			SI022260
1-pol., 1 pol sa 4 odvoda, 35 mm ²	40x44x44	1	02526	0,129	4021267025267			SI025260
2-pol., 2 pola s po 4 odvoda, 25 mm ²	77x44x44	1	02246	0,255	4021267022464			SI022460
2-pol., 2 pola s po 2 odvoda, 35 mm ²	77x44x44	1	02244	0,255	4021267022440			SI022440
4-pol., 3 pola s po 2 odvoda + 1 pol sa 6 odvoda 25 mm ²	192x60x46	1	02544	0,486	4021267025441			SI025440
4-pol., 4 pola s po 2 odvoda, 35 mm ²	155x60x46	1	02517	0,393	4021267025175			SI025170
4-pol., 4 pola s po 2 odvoda, 25 mm ²	155x60x46	1	02505	0,399	4021267025052			SI025050
5-pol., 5 polova s po 2 odvoda, 25 mm ²	192x60x46	1	02538	0,491	4021267025380			SI025380
70 mm²								
1-pol., 1 pol sa 2 odvoda 50 mm ² , pričvršćen vijcima	67x65x70	1	02216	0,332	4021267022167			SI022160
1-pol., 1 pol sa 4 odvoda 50 mm ² , pričvršćen vijcima	67x65x70	1	02217	0,460	4021267022174			SI022170
1-pol., 1 pol sa 2 odvoda 50 mm ² , uskočno pričvršćen	67x65x70	1	02247	0,364	4021267022471			SI022470
1-pol., 1 pol sa 4 odvoda 50 mm ² , uskočno pričvršćen	67x65x70	1	02248	0,490	4021267022488			SI022480
POKROVNI PROFIL ZA ODVOJNE STEZALJKE GLAVNOG VODA TIP A, 25-35 mm²								
pokrov duljine 1m	1000	10	78491	0,084	4021267784911			SI784910


REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE

PREGLAD PREDNOSTI

- kompaktne dimenzije
- direktno učvršćivanje na ploču ili uskočna montaža na DIN nosač
- horizontalna i vertikalna montaža na DIN nosač
- utične odvodne stezaljke
- bočno dodavanje stezaljki u niz
- dostupni u sivoj, plavoj, zelenoj i plavo/zelenoj boji

mogućnost nizanja Easy Connection Box

vijčane stezaljke za glavni dovod

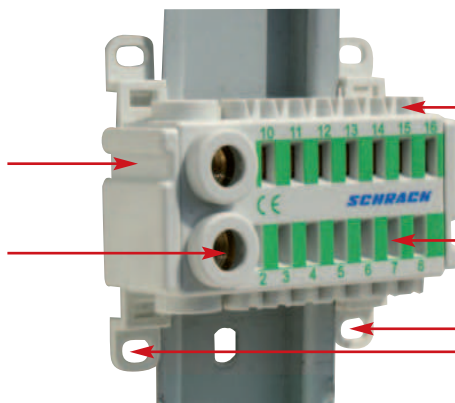


utične stezaljke za izlazne vodiče

otpuštanje priključenih utičnih stezaljki



mogućnost izravnog pričvršćenja vijcima

HORIZONTALNA MONTAŽA



DIMENZIJE (mm)

VERTIKALNA MONTAŽA

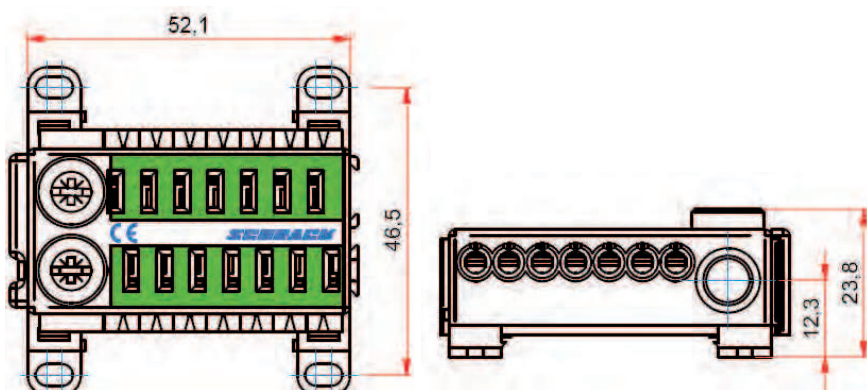


REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE


EASY CONNECTION BOX




IK021078



IK021079



IK021080



IK021081

TEHNIČKI PODACI

- materijal:
 - tijelo stezaljki: mjed
 - kućište: PA66-V0 grau RAL 7035
 - pokrov: PA66-V0 grau RAL 7035
 - završne pločice: PA66-V0 grau RAL 7035
 - nosač stezaljki: E-Cu
 - pričvrtni vijak: čelik, križni
- toplinska postojanost: HDT B ISO179 = 200°C – UL94-V0/1,5
- CTI vrijednosti izolacije: 600V
- propisi: EN 60998-1:2004, EN 60998-2:2004, EN60998-2-2:2004, EN60999-1:2000, VDE 0603-1
- električni podaci:
 - maks. električno opterećenje: 80A
 - klasa zaštite: IP20

MOGUĆNOSTI PRIKLJUČKA

vijčane stezaljke

tip kabela	H07V-U – jednožilni H07V-R – višežilni	H07V-K – finožičani (s kabelskim završetkom)
maks. priključak Ø:	25 mm ²	16 mm ²
min. priključak Ø:	1,5 mm ²	1,5 mm ²


utične stezaljke

tip kabela:	H05V-U – jednožilni H07V-U – jednožilni H07V-R – višežilni H07V-K – finožičani (bez kabelskog završetka)	H05V-K – finožičani (s kabelskim završetkom) H07V-K – finožičani (s kabelskim završetkom)
maks. priključak Ø:	6 mm ²	4 mm ²
min. priključak Ø:	0,5 mm ²	0,5 mm ²


OPIS	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
EASY CONNECTION BOX plava, 2 x 25 mm ² , 14 x 6 mm ²	9004840519525			IK021078
EASY CONNECTION BOX zelena, 2 x 25 mm ² , 14 x 6 mm ²	9004840519532			IK021079
EASY CONNECTION BOX plavo/zelena, 1 x 25 mm ² , 7 x 6 mm ²	9004840519549			IK021080
EASY CONNECTION BOX siva, 2 x 25mm ² , 14 x 6 mm ²	9004840521191			IK021081

REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE

IZOLIRANE N- I PE-STEZALJKE



IK021036



IK021039

SCHRACK-INFO

- uskočna montaža na H nosač
- maks. opterećenje 63 A
- izolirana izvedba
- presjek priključnih vodiča 16 mm²

OPIS	PAK	TIP	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
izolirane PE-stezaljke, 15 odvoda	1	ISO-SL-KLEM 15	9004840449198			IK021039I
izolirane N-stezaljke, 15 odvoda	1	ISO-N-KLEM 15	9004840449181			IK021038I
izolirane PE-stezaljke, 7 odvoda	1	ISO-SL-KLEM 7	9004840449075			IK021037I
izolirane N-stezaljke, 7 odvoda	1	ISO-N-KLEM 7	9004840449068			IK021036I

N- I PE-STEZALJKE



IK021036

SCHRACK-INFO

- uskočna montaža na H nosač
- maks. opterećenje 63 A
- presjek priključnih vodiča 16 mm² Ye, Ym; Yf s kabelskim završetkom maks.10 mm²

OPIS	PAK	TIP	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
N/PE-stezaljke, 12 odvoda	1	NL/SL-S	9004840086928			BK004405
PE-stezaljke, 15 odvoda	1	SL-KLEM 15	9004840022124			IK021039
N-stezaljke, 15 odvoda	1	N-KLEM 15	9004840022117			IK021038
PE-stezaljke, 7 odvoda	1	SL-KLEM 7	9004840022100			IK021037
N-stezaljke, 7 odvoda	1	N-KLEM 7	9004840022094			IK021036



NAVIGATOR ZNA NAJKRAĆI PUT!

SCHRACK TECHNIK INTERNET TRGOVINA NA WWW.SCHRACK.HR

- Lakše do informacija o proizvodima
- Kupovina 24/7
- Brzo do kontakt podatka Vašeg Schrack zastupnika

REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE

N/PE SABIRNICE I NOSAČI SABIRNICA



IK018004

SCHRACK-INFO

- nosač: uskočna montaža 2 sabirnice
- uskočno pričvršćenje na DIN nosač ili vijkom i maticom na C nosač.

OPIS	ŠxVxD (mm)	PAK	TIP	MASA BAKRA (kg)	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
nosač N/PE sabirnice 10mm ²	-	1	NT-10	-	9004840021554			IK018004
nosač N/PE sabirnice 16mm ²	-	1	NT-16	-	9004840038309			IL900315
N/PE sabirnica 10 mm ²	L=1 m	1	NLS 10	542	9004840021813			IK020014
N/PE sabirnica 16 mm ²	L=1 m	1	NLS 16	678	9004840021844			IK020018
N/PE sabirnica 25 mm ²	L=1 m	1	NLSL 25	1270	9004840126068			IK020013
četverostupanjski izolacijski	-	1	ISO 4St.	-	9004840021837			IK020017
element za IK 020017	L=1 m	1	ISO 4st. ABD	-	9004840184952			IK020011
dodatna stezaljka								
za priključak do 25 mm ²	-	1	ZKLEM 25	-	9004840021820			IK020015
dodatna stezaljka, čelik, 25 mm ²	-	1	ZK25ST	-	9004840107364			IK020016
N/PE bakrena sabirnica	-	1	CU3/10	-	9004840022407			IK021134
dodatna stezaljka za sabirnice	-	1	AK35	-	9004840665635			IK020022

306

SABIRNICA ZA IZJEDNAČENJE POTENCIJALA



BS900200

SCHRACK-INFO

- za kućne priključke do 100 A
- s plastičnim pokrovom
- 1 traka za uzemljenje do 30 x 3,5 mm
- 1 okrugli vodič 7 - 10 mm
- nazivni presjek vodiča i moment pritezanja otisnuti na stezaljci

PROPISI

VDE 0606 § 7 i § 8

OPIS	PAK	TIP	MASA (kg)	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
sabirnica za izjednačenje potencijala	1	POT	0,225	9004840013337			BS900200



NAVIGATOR ZNA NAJKRAĆI PUT! SA SCHRACK TECHNIK LIVE-PHONE APLIKACIJOM

- Tehnički podaci uvijek na raspolaganju
- Informacije o raspoloživosti i cijenama artikla
- Kupovina i narudžba artikala na dlanu

REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE

DISTRIBUCIJSKI BLOKOVI - OPĆE INFORMACIJE



IKB14016

SCHRACK-INFO

- štede prostor i osiguravaju strujne krugove
- štede oko 80% vremena prilikom ožičavanja
- montaža na DIN nosač i montažne ploče
- modularna ugradnja, s više blokova moguće sastaviti 1-4-polne sisteme
- stupanj zaštite IP 20

DISTRIBUCIJSKI BLOK 1-POLNI, 80 A



IKB01016

SCHRACK-INFO

- stezaljke, dovod: 1 x 2,5 – 16 mm²
odvod: 2 x 2,5 – 16 mm²
4 x 2,5 – 6 mm²

OPIS	ŠxVxD (mm)	PAK	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
distribucijski blok 1-polni, 80A, dovod 1x16 mm ² , odvod 2x16 mm ² i 4x6 mm ²	27x66x47	1	9004840449112			IKB01016

DISTRIBUCIJSKI BLOK 1-POLNI, 125 A



IKB01035

SCHRACK-INFO

- stezaljke, dovod: 1 x 10 – 35 mm²
1 x 2,5 – 16 mm²
odvod: 6 x 2,5 – 16 mm²

OPIS	ŠxVxD (mm)	PAK	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
distribucijski blok, 1-pol. 125A, dovod 1x35 mm ² i 1x16 mm ² , odvod 6x16 mm ²	27x66x47	1	9004840449129			IKB01035
N-distribucijski blok, 1-pol. 125A, dovod 1x35 mm ² i 1x16 mm ² , odvod 6x16 mm ²	27x66x47	1	9004840655810			IKB01035N
PE-distribucijski blok, 1-pol. 125A, dovod 1x35 mm ² i 1x16 mm ² , odvod 6x16 mm ²	27x66x47	1	9004840655827			IKB01035PE

REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE

DISTRIBUCIJSKI BLOK 1-POLNI, 80 A



IKB01070

SCHRACK-INFO

- moguć bočni paralelni spoj s Cu 15 x 5
- stezaljke, dovod: 1 x 10 – 70 mm²
odvod: 6 x 2,5 – 16 mm²

OPIS	ŠxVxD (mm)	PAK	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
distribucijski blok 1-polni, 160A, dovod 1x70 mm ² , odvod 6x16 mm ²	35x92x49	1	9004840449136			IKB01070

DISTRIBUCIJSKI BLOK 1-POLNI, 250 A



IKB01120

SCHRACK-INFO

- stezaljke, ulaz: 1 x 35 – 120 mm²
odvod: 2 x 6 – 35 mm²
5 x 1,5 – 16 mm²
4 x 1,5 – 10 mm²

OPIS	ŠxVxD (mm)	PAK	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
distribucijski blok 1-pol., 250A, dovod 1x120 mm ² , odvod 2x35 mm ² , 5x16 mm ² i 4x10 mm ²	44,5x95,5x49	1	9004840449143			IKB01120

DISTRIBUCIJSKI BLOK 1-POLNI, 400 A



IKB01185

SCHRACK-INFO

- stezaljke, ulaz: 1 x 95 – 185 mm²
odvod: 2 x 6 – 35 mm²
5 x 1,5 – 16 mm²
4 x 1,5 – 10 mm²

OPIS	ŠxVxD (mm)	PAK	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
distribucijski blok 1-pol., 400A, dovod 1x185 mm ² , odvod 2x35 mm ² , 5x16 mm ² i 4x10 mm ²	44,5x95,5x49	1	9004840449105			IKB01185

REDNE STEZALJKE, STEZALJKE USPONSKIH VODOVA, INSTALACIJSKE STEZALJKE

DISTRIBUCIJSKI BLOK 4-POLNI, 80 A



IKB04016

SCHRACK-INFO

- dovod po polu: 1 x 2,5 – 16 mm²
odvod: 8 x 1,5 – 10 mm²

OPIS	ŠxVxD (mm)	PAK	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
distribucijski blok 4-polni, 80A, po polu: dovod 1x16 mm ² , odvod 8x10 mm ²	74,5x98x45	1	9004840449150			IKB04016

DISTRIBUCIJSKI BLOK 4-POLNI, 100 A



IKB14016

SCHRACK-INFO

- dovod po polu: 1 x 10 – 35 mm²
odvod: 3 pola: 5 x 1,5 – 6 mm²
6 x 2,5 – 16 mm²
1 pol: 4 x 1,5 – 6 mm²
6 x 2,5 – 16 mm²

OPIS	ŠxVxD (mm)	PAK	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
distribucijski blok 4-polni, 100A, po polu: dovod 1x35 mm ² , dvodi: 3 pola sa 5x6 mm ² i 2x16 mm ² + 4. pol 4x6 mm ² i 6x16 mm ²	75x45x98	1	9004840449174			IKB14016

DISTRIBUCIJSKI BLOK 4-POLNI, 125 A



IKB04035

SCHRACK-INFO

- dovod po polu: 2 x 10 – 35 mm²
odvod: 10 x 2,5 – 16 mm²

OPIS	ŠxVxD (mm)	PAK	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
distribucijski blok 4-polni, 125A, po polu: dovod 2x35 mm ² , odvod 10x16 mm ²	85x129x48	1	9004840449167			IKB04035

DISTRIBUCIJSKI BLOK 4-POLNI, 160 A



IKB04050

SCHRACK-INFO

- dovod po polu: 1 x 10 – 35 mm²
odvod: 3 x 6 – 25 mm²
8 x 2,5 – 16 mm²

OPIS	ŠxVxD (mm)	PAK	EAN KOD	RASPOLOŽ.	STORE	KAT. BROJ
distribucijski blok, 4pol. 160A, po polu: dovod 1x35 mm ² , odvod 3x25 mm ² i 8x16 mm ²	90x160,5x50	1	9004840449099			IKB04050